

**WOODS**

# **SINGLE-SPINDLE ROTARY CUTTERS**



**SUPERIOR DESIGN ■ SUPERIOR DURABILITY ■ SUPERIOR STYLE**

# SINGLE-SPINDLE ROTARY CUTTERS

## TABLE OF CONTENTS

<b>Single-spindle 30- and 40-series BrushBull™</b> .....	<b>4</b>
BB48.30	
BB60.30	
BB72.30	
BB84.40	
<b>Specifications Chart</b> .....	<b>5</b>
<b>Single-spindle 50-series BrushBull™</b> .....	<b>6</b>
BB60.50	
BB72.50	
BB84.50	
<b>Specifications Chart</b> .....	<b>7</b>
<b>Single-spindle 60-series BrushBull™</b> .....	<b>8</b>
BB60.60	
BB72.60	
BB84.60	
<b>Specifications Chart</b> .....	<b>9</b>
<b>RC-Series Rotary Cutters</b> .....	<b>10</b>
RC42.20	
RC48.20	
RC60.20	
RC72.20	
<b>Specifications Chart</b> .....	<b>11</b>
<b>Ditch Bank Mowers</b> .....	<b>12</b>
DBH5.31	
DBH6.31	
<b>Specifications Chart</b> .....	<b>12</b>

## Woods

**GENUINE PARTS**

Maintain the quality and performance of your Woods equipment with Woods genuine replacement parts, paint, and lubricants. Available from your authorized Woods dealer.

### Find a Woods Dealer

Woods equipment is distributed through a network of authorized dealers. To find your nearest store visit us at [woodsequipment.com](http://woodsequipment.com) or call 800-319-6637.



**SUPERIOR DESIGN ■ SUPERIOR DURABILITY ■ SUPERIOR STYLE**



# SINGLE-SPINDLE ROTARY CUTTERS

**Put our products to the test in your own back yard. Rugged, dependable and productive — Woods rotary cutters are designed for the extremes of real world use.**

## Start at the Beginning

Since 1946, Woods has grown to become the undisputed cutter expert. This legacy began with development of the first tractor-mounted rotary cutter and continues today with unmatched product innovations such as greasable Quick-change blade pins and a smooth, sloped deck that sheds debris.

And yet, we still go back to customers like you before redesigning a product. Erasing preconceptions, we listen – really listen – to what you need and value. Then, Woods Engineers go to work creating a product that you will love to use.

Finally, we make it just a bit more durable, kick up the performance and add style, because that's what people expect from Woods.

Newly redesigned, the top-selling Woods BrushBull™ is easy to use and maintain, delivers superior cut quality and performance, and looks good doing it. Year after year after year.



# BRUSHBULL™ SINGLE-SPINDLE ROTARY CUTTERS

Our most popular models are ideal for clearing brush along fence rows, maintaining miles of interstate highways, and cutting overgrown grass, weeds and brush wherever you need to tame the land.

## TRACTOR PTO HP RANGE: 15 - 75 HP

### Models

**BB48.30** | 48-inch  
**BB60.30** | 60-inch  
**BB72.30** | 72-inch

- Three-point hitch: CAT 1.
- Cuts brush up to two inches in diameter and nine inches tall.
- Six-year limited gearbox warranty includes the seals.
- A deep deck, with half-inch by four-inch blades and rear baffling work together to evenly cut and distribute large amounts of material, for a superior cut quality.

## TRACTOR PTO HP RANGE: 35 - 90 HP

### Models

**BB84.40** | 84-inch

- Three-point hitch: CAT 1 & 2.
- Cuts brush up to two inches in diameter and twelve inches tall.
- Six-year limited gearbox warranty includes the seals.
- Eleven-inch deep deck, with half-inch by four-inch blades and rear baffling work together to evenly cut and distribute large amounts of material, for a superior cut quality.
- Choose an optional dual tailwheel or check chain, for adjusting the mowing height.



**BB48.30**  
Shown with optional  
chain shielding



**BB84.40**  
Shown with optional  
chain shielding

SPECIFICATIONS		BRUSHBULL™ SINGLE-SPINDLES			
MODEL	BB48.30	BB60.30	BB72.30	BB84.40	
Tractor PTO HP	15-50 hp	25-50 hp	30-75 hp	35-90 hp	
Hitch Category/Type	CAT 1 clevis			CAT 1 & 2 clevis	
Cutting Width (inches)	48"	60"	72"	84"	
Total Weight (lbs)	590	672	811	1,041	
Cutting Capacity Diameter (inches)	2"	2"	2"	2"	
Cutting Height (inches)	1" - 9"			2" - 12"	
Transport Width (inches)	55"	67.3"	79.3"	91.3"	
Overall Length (inches)	86"	99"	111"	124"	
Tractor PTO Speed (rpm)	540			540	
Quick-hitch Compatible	yes			yes	
Rear Bumper	Z-channel			Z-channel	
Frame & Deck Support	3" x 3" tube			3" x 3" tube	
Deck Construction	smooth top, sloped			smooth top, sloped	
Skid Shoes	full-length, replaceable			full-length, replaceable	
Deck Thickness	12 ga (.105")		11 ga (.120")	11 ga (.120")	
Side Frame Thickness (inches)	10 ga (.135")			10 ga (.135")	
Side Frame Depth (inches)	10.5"			11.6"	
Gearbox Warranty	6-year limited			6-year limited	
Gearbox HP	65 hp	65 hp	75 hp	90 hp	
Output Shaft Diameter (inches)	1.57"			2"	
Blade Tip Speed	13,000 fpm	14,335 fpm	14,963 fpm	15,086 fpm	
Blade Dimensions (inches)	.50" x 4"			.50" x 4"	
Blade Pin Diameter (inches)	1.50"			1.50"	
Blade Carrier	oval stump jumper			oval stump jumper	
Driveline Protection	slip-clutch			slip-clutch	
Options	check chain			check chain, dual tailwheel	





## SUPERIOR DESIGN

Customers like you told us what's important in a single-spindle cutter. Then, we redesigned our premium BrushBull cutter to meet – and exceed – your needs. An adjustable drive lift hanger and quick-hitch compatibility make it easy to attach. A large access window on top of the deck and our exclusive, greasable Quick-change blade pins make blade changes easy, even in the field. But, you're not sacrificing performance for ease. A deep deck, large half-inch by four-inch blade and welded baffle work together, creating a strong suction that lifts, then evenly cuts and distributes large amounts of material.

## SUPERIOR DURABILITY

Choose a BrushBull for the hours of testing in extreme conditions, and a Z-shaped, high-strength steel bumper that's twice as thick as competitive models, for added durability when backing over tough brush. Or, choose Woods for the advanced gearbox seal technology that's so good our 6-year limited warranty includes the seals. That's worry-free reliability.

## SUPERIOR STYLE

Woods was the first to introduce a smooth, sloped deck that sheds debris. And, raising components off the deck makes clean-up easy. Front corners angle back to give operators more room between the tractor tire and cutter.



Adjustable driveline hanger makes it easier to attach, and is standard on all models.

Corners angle back to give operators more room between the tractor tire and cutter.

Full-length, bolt-on skid shoes protect the deck and are easy to change. Adjust the height on heavy-duty models.

Smooth, sloped deck sheds debris and is easy to clean.



**SUPERIOR DESIGN**  
**SUPERIOR DURABILITY**  
**SUPERIOR STYLE**



New, advanced gearbox seal technology is designed for hard conditions, reduces leaks and downtime and is backed by our six-year gearbox warranty, which includes the seals.

Greasable Quick-change blade pins are easy to maintain and remove.



A large blade access window makes it easy to reach our exclusive Quick-change pins and quickly change the blade from the top of the deck.



**BB60.30**  
Shown with optional chain shielding

High-strength steel bumper is 2-times thicker than competitive models, with a Z-channel frame for added durability when backing over tough brush.

## SUPERIOR DESIGN, DURABILITY AND STYLE UNDER THE DECK, TOO!



- Rear baffle, standard on all models, concentrates the airflow and ensures cut material is distributed evenly.
- The large 1/2-inch by 4-inch blades and extra deep deck precisely cut large amounts of material.
- A beefier, heavy-duty crossbar and 1/4-inch steel stump jumper protect the undercarriage from extreme conditions.
- The frame is built with full-length 3-inch by 3-inch tubes and channels for extra durability.



**WOODS BRUSH BULL**

## TRACTOR PTO HP RANGE: 30 - 150 HP

### Models


**BB60.50** | 60-inch  
**BB72.50** | 72-inch  
**BB84.50** | 84-inch

- Three-point hitch: CAT 1 & 2, CAT 2 & 3.
- Cuts brush up to three inches in diameter and twelve inches tall.
- Six-year limited gearbox warranty includes the seals.
- High-strength 10 gauge steel deck manufactured for tough conditions.
- A deep deck, with half-inch by four-inch blades and rear baffling work together to evenly cut and distribute large amounts of material, for a superior cut quality.
- Options include round stump jumper, check chains for height adjustments, and dual tail wheel on the BB72.50 and BB84.50.

SPECIFICATIONS		BRUSHBULL™ SINGLE-SPINDLES		
MODEL	BB60.50	BB72.50	BB84.50	
Tractor PTO HP	30-150 hp		40-150 hp	
Hitch Category/Type	CAT 1 & 2 clevis		CAT 2 & 3 clevis	
Cutting Width (inches)	60"	72"	84"	
Total Weight (lbs)	975	1125	1335	
Cutting Capacity Diameter (inches)	3"			
Cutting Height (inches)	2" - 12"			
Transport Width (inches)	67.3"	79.3"	91.3"	
Overall Length (inches)	100v	112"	124"	
Tractor PTO Speed (rpm)	540			
Quick-hitch Compatible	yes			
Rear Bumper	Z-channel			
Frame & Deck Support	3" x 3" tube			
Deck Construction	smooth top, sloped			
Skid Shoes	full-length, replaceable			
Deck Thickness	10 ga (.135")			
Side Frame Thickness (inches)	0.25"			
Side Frame Depth (inches)	12.7"			
Gearbox Warranty	6-year limited			
Gearbox HP	150 hp			
Output Shaft Diameter (inches)	2"			
Blade Tip Speed	15,525 fpm	15,900 fpm	16,000 fpm	
Blade Dimensions (inches)	.50" x 4"			
Blade Pin Diameter (inches)	1.5"			
Blade Carrier	diamond stump jumper, optional round			
Driveline Protection	slip-clutch			
Options	check chains, round stump jumper	check chains, round stump jumper, dual tailwheel		

## Count on the integrity of the BrushBull frame

- Stress points are tied to full-length 3-inch by 3-inch tubes, not on the deck plate, for added stability.
- A full frame design means strength and durability are built into every BrushBull from the frame out.
- The rear bumper is a Z-shaped channel that's two-times thicker than competitive models, adding structural integrity when backing over brush.

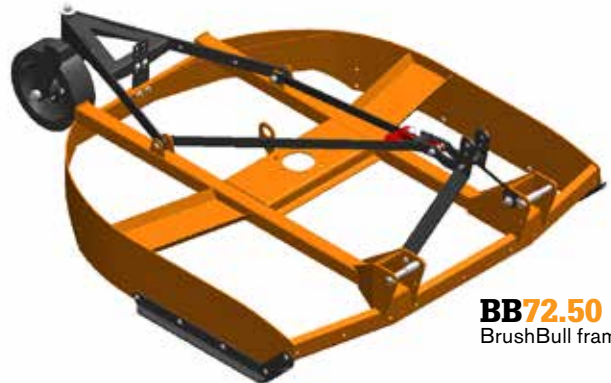

**BB72.50**  
BrushBull frame



## TRACTOR PTO HP RANGE: 40 - 210 HP

### Models

**BB60.60** | 60-inch

**BB72.60** | 72-inch

**BB84.60** | 84-inch

- Three-point hitch: CAT 1 & 2, CAT 2 & 3.
- Cuts brush and saplings up to four inches in diameter and twelve inches tall.
- Six-year limited gearbox warranty includes the seals.
- High-strength 10 gauge steel deck is made for extreme conditions.
- Deck is 12.7 inches deep, with half-inch by four-inch blades, and rear baffling that work together to evenly cut and distribute large amounts of material, for a superior cut quality.
- Options include round stump jumper, check chains for height adjustments, and dual tail wheel on the BB72.60 and BB84.60 models.



**VIDEO**

SPECIFICATIONS	BRUSHBULL™ SINGLE-SPINDLES		
	BB60.60	BB72.60	BB84.60
Tractor PTO HP	40-150 hp	50-210 hp	65-210 hp
Hitch Category/Type	CAT 1 & 2 clevis		CAT 2 & 3 clevis
Cutting Width (inches)	60"	72"	84"
Total Weight (lbs)	1045	1210	1440
Cutting Capacity Diameter (inches)	4"		
Cutting Height (inches)	2" - 12"		
Transport Width (inches)	67.3"	79.3"	91.3"
Overall Length (inches)	100"	112"	124"
Tractor PTO Speed (rpm)	540		
Quick-hitch Compatible	yes		
Rear Bumper	Z-channel		
Frame & Deck Support	3" x 3" tube		
Deck Construction	smooth top, sloped		
Skid Shoes	adjustable height full-length, replaceable		
Deck Thickness	10 ga (.135")		
Side Frame Thickness (inches)	0.25"		
Side Frame Depth (inches)	12.7"		
Gearbox Warranty	6-year limited		
Gearbox HP	210 hp		
Output Shaft Diameter (inches)	3"		
Blade Tip Speed	13,570 fpm	13,945 fpm	14,250 fpm
Blade Dimensions (inches)	.50" x 4"		
Blade Pin Diameter (inches)	1.5"		
Blade Carrier	diamond stump jumper, optional round		
Driveline Protection	slip-clutch		
Options	check chains, round stump jumper	check chains, round stump jumper, dual tailwheel	



### BB72.60

Shown with standard chain shielding

## RC-SERIES SINGLE-SPINDLE ROTARY CUTTERS

Woods' RC-Series Single-spindle is ideal for getting the most from your compact or subcompact tractor. Built with high-strength steel, Woods confidently stands behind this product with our three-year gearbox warranty.



**RC72.20** shown with optional chain shielding

### Designed for Value

An economical rotary cutter for maintaining grassy pastures, open fields and recreational trails.

- Four cutting widths to fit the size of your job and paint colors to match your tractor.
- Unique smooth, sloped decks are easy to clean and reduce build-up of water and debris.
- Stump jumpers are standard on all models for added driveline protection.
- High-strength steel and quality parts provide dependable service year-after-year.
- Three-year gearbox warranty is one of the best in the industry.

### TRACTOR PTO HP RANGE: 15 - 50 HP

#### Models

**RC42.20** | 42-inch  
**RC60.20** | 60-inch

**RC48.20** | 48-inch  
**RC72.20** | 72-inch

SPECIFICATIONS		SINGLE-SPINDLE ROTARY CUTTERS			
MODEL	RC42.20	RC48.20	RC60.20	RC72.20	
Tractor PTO HP	15-40 hp		20-50 hp		
Hitch Category / Type	CAT 1 cantilevered				
Cutting Width (inches)	42"	48"	60"	72"	
Cutting Height Range (inches)	2"- 9"				
Cutting Capacity (inches)	1"				
Gearbox Horsepower	50 hp				
Blade Tip Speed	11,460 fpm	13,100 fpm	13,620 fpm	14,340 fpm	
Side Frame Depth (inches)	7"				
Approximate Weight (lbs)	360	410	494	575	
Blade Dimensions (inches)	.5" x 3"				
Blade Carrier	oval stump jumper				
Tail Wheel	4" x 16" laminated				
Driveline Protection	shear-bolt or slip-clutch				
Driveline Holder	yes, on deck				
Tractor PTO Speed (rpm)	540				
Quick-hitch Ready	yes				
Warranty (cutter/gearbox)	1 year / 3 years				
Options	check chains, bolt-on skid shoes, chain shielding				

## Woods RC-Series Rotary Cutters – durable, versatile, affordable



Strong, fabricated tail wheel assembly with solid, laminated tire



Breaklink allows cutter to float and follow terrain for better cut quality



Optional bolt-on replaceable skid shoes for longer wear



Optional chain shielding for added protection from thrown objects



# DITCH BANK CUTTER

The hydraulic-drive Woods Ditch Bank Cutter is a rugged and versatile tool, precision-engineered for maintaining ditches, roadways, ponds and waterways.



## TRACTOR PTO HP RANGE: 60 - 150 HP

### Models

**DBH5.31** 5-foot

**DBH6.31** 6-foot

- Highest-rated cutting horsepower in its class – full 40 hp at cutting head.
- Only 6-foot model on the market – Choose 5-foot or 6-foot model.
- Quick-Change blade system means fast, easy changes with a 3/4" wrench.
- Narrow 119-inch transport width – no frame overhang, even on 6-foot units.
- Fixed counter weight position does not extend beyond width of road lane.
- Cuts at almost any angle with +/- 90° flex (90° up, 90° down).
- Optional hydraulic cooling system for working longer and more efficiently in extreme conditions.
- Cuts vegetation up to 2 inches in diameter.

SPECIFICATIONS	HYDRAULIC DITCH BANK CUTTERS	
MODEL	DBH5.31	DBH6.31
Tractor PTO HP Range	60 - 150 hp	
Tractor PTO speed (RPM)	540 / 1,000	
Cutting Width	60"	72"
Cutting Capacity Diameter	2"	
Cutting Height	2" - 10"	
Transport Width	119"	
Side Shift	30"	
Reach: Tractor Center to Outside of Cutter	158"	168"
Overall Length	72"	84"
Flex Range Angles	90° up, 90° down	
Approximate Weight (without hyd oil)	2,000 lbs	2,300 lbs
Tractor Weight Min.	6,000 lbs	
3-point Hitch Lift Capacity Min.	2,500 lbs	
Max HP at Cutting Head	40	
Hitch	CAT 2/3, CAT 2 & 3 QH	
Blade Tip Speed at 540 RPM	15,800 fpm	18,900 fpm
Blade Tip Speed at 1000 RPM	16,000 fpm	17,700 fpm
Cutter Deck Thickness	0.135" (10 gauge)	
Deck Side Depth	9.4"	9.5"
Side Frame Thickness	0.135"	
Shielding	Chain Standard	
Gauge Wheels	optional	
Tail Wheel	optional - frame mounted	
Cooler	optional	
Hydraulic Tank Capacity	35-Gallon	

POWER  
TEAM

Got ideas?

Join our customer panel at  
[woodsequipment.com/power](http://woodsequipment.com/power).

You have the power...

**WOODS®** | A Blount International Brand  
2606 South Illinois Route 2, Oregon, Illinois 61061 tel 800-319-6637 [woodsequipment.com](http://woodsequipment.com)

WOODS®

A Blount International Brand

Warning! Some images may show safety shields removed to provide a better view. Equipment should never be operated with any safety shield removed. Some machines in this brochure may be shown with optional equipment. Always operate machines in accordance with supplied operator's manuals. ©2020 Woods Equipment Company. All rights reserved. WOODS and Woods logo are trademarks of Woods Equipment Company. All other trademarks, trade names, or service marks not owned by Woods Equipment Company that appear in this brochure are the property of their respective companies or mark holders. Specifications subject to change without notice.